

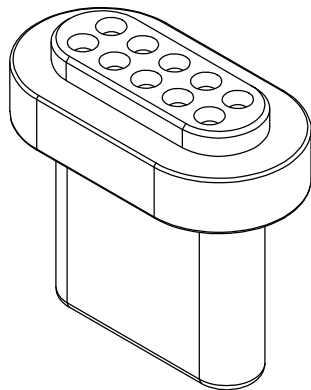
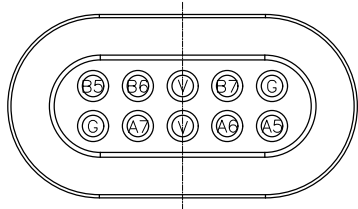


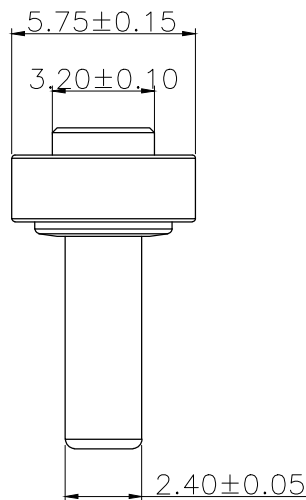


REV	DESCRIPTION	DATE	APPROVED

- 1.ELECTRICAL:
CURRENT:5A
CONTACT RESISTANCE:40 MILLIOHMS MAX
DIELECTRIC WITHSTANDING VOLTAGE: 100V AC
INSULATION RESISTANCE:100 MEGOHMS MIN
- 2.MECHANICAL:
MAGNETIC FORCE:8N MIN
DURBILITY:10000 CYCLES
- 3.ENVIRONMENTAL:
TEMPERTURE RANGE -40℃~105℃
SALT TESTING:24 HOURS(Except for magnets)

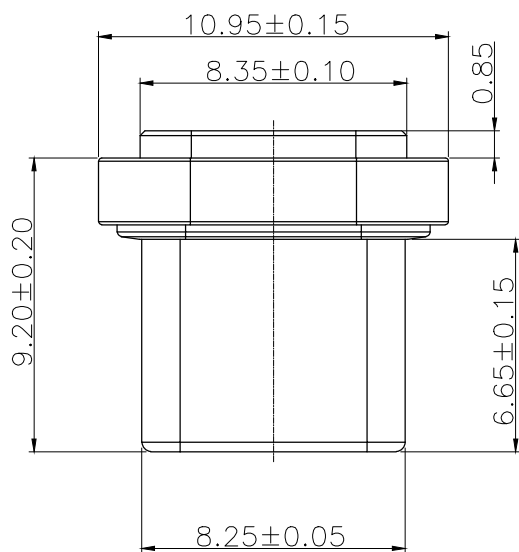


接点表

A4 A9 B4 B9	VBUS
A1 A12 B1 B12	GND
A5	A5
B5	B5
A6	A6
A7	A7
B6	B6
B7	B7

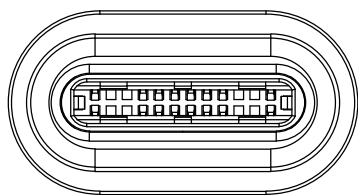

8	MD PLASTIC	LOW TEMP	BLACK	UL 94V-0
7	Magnet	Neodymium iron boron	WHITE	Ni Plated
6	FR4	—	—	—
5	HOUSING	HIGH TEMP	Purple	UL 94V-0
4	TYPE C MD	HIGH TEMP	BLACK	UL 94V-0
3	LACTH	STAINLESS STEEL	—	—
2	TYPE C TERMINAL	COPPER ALLOY	—	Gold 1u"
1	SHELL	COPPER ALLOY	—	Ni Plated
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

CUSTOMER DRAWING			铭创科技（东莞）有限公司		
UNITS mm	SCALE 1:1	SHEET 1 OF 1	Mingchuang Technology (Dongguan) Co., Ltd		
PROJECTION: 		DRAW: DAP	TITLE 椭圆磁吸公座 10PIN		
GENERAL TOLERANCE 0. ±0.35 0.0 ±0.25 0.00 ±0.15 0.° ±4° 0.0° ±3°		CHECK: HWT	MAT'L SEE TABLE		FINISH SEE TABLE
		APPD: HHM	DWG. NO. C251001A		PART NO. _____ A4